


## PTFE insulated heating tape

Isopad IT-ITW/SS-M is a factory-terminated heating tape having a go-and-

return series-resistance heating element insulated with a PTFE sheath covered with

a stainless-steel braid complete with M20 gland.

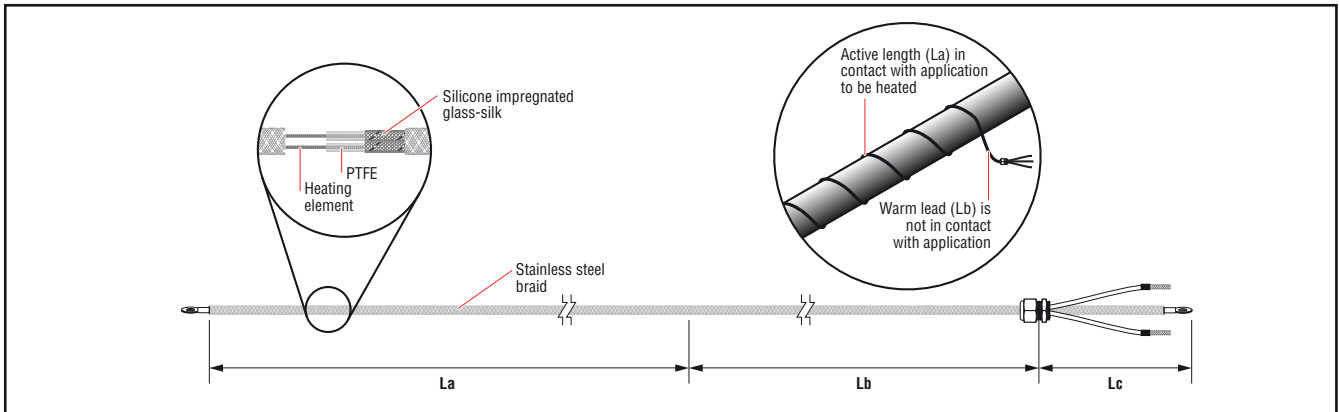

### Area Specifications

Area classification	Nonhazardous, ordinary area
Ingress protection	IP64
Electrical protection class	Class I
Maximum withstand temperature (power off)	260°C
Minimum installation temperature	-70°C

### Standard Manufacturing Sizes

Width	8 mm ±10%
Thickness	3 mm ±10%

### Heater Construction

Type	Resistance heating cable
Material	Various alloys
Material of insulation	PTFE / silicone impregnated glass-silk
Material of outer sheath	Stainless steel braid

### Lead Connection

Warm lead (Lb) pipe to gland	Short or long warm lead, for length see Ordering Information
Glands	Brass M20
Tails (Lc) gland to crimp pins	Warm tail 150 mm long Conductors insulation with PTFE and glass braid Separate braided earth lead

### Technical Data

Frequency	50-60 Hz
Nominal operating voltage	240 / 110 Vac
Power per meter	33 / 44 / 55 W/m

**Technical Data**

Maximum operating temperature	170°C at 33 W/m 140°C at 44 W/m 110°C at 55 W/m
Minimum bend radius	7.5 mm
Minimum spacing	10 mm

**Ordering Information**

Output		33 W/m			44 W/m			55 W/m		
Maximum pipe temperature (power on)		170°C			140°C			110°C		
Voltage	Part number	Active length (La) <sup>(1)</sup> (m)	Nominal power <sup>(2)</sup> (W)	Part number	Active length (La) <sup>(1)</sup> (m)	Nominal power <sup>(2)</sup> (W)	Part number	Active length (La) <sup>(1)</sup> (m)	Nominal power <sup>(2)</sup> (W)	
240 V	847952-000	1.4	56	002178-000	1.2	64	557710-000	1.0	74	
	589014-000	2.7	96	718330-000	2.3	111	850242-000	2.0	125	
	982248-000	4.0	134	204374-000	3.5	152	682904-000	3.0	175	
	597582-000	5.0	181	335040-000	4.4	204	531646-000	4.0	223	
	968558-000	6.5	212	107772-000	5.5	248	106750-000	5.0	272	
	501660-000	8.0	267	448548-000	6.9	308	903780-000	6.0	352	
	816604-000	10.0	309	148750-000	8.3	368	544222-000	7.5	405	
	841870-000	11.0	356	856882-000	9.4	413	716584-000	8.5	455	
	296864-000	12.0	425	955144-000	10.5	459	043498-000	9.5	504	
	-	-	-	-	-	-	-	315 700-000	10.5	556
110 V	633594-000	1.4	44	929724-000	1.2	50	740004-000	1.0	58	
	606686-000	2.7	81	209176-000	3.5	122	775996-000	2.0	105	
	388864-000	5.0	162	398898-000	4.4	183	574268-000	3.0	141	
	334416-000	6.5	189	923494-000	6.9	256	270328-000	4.0	246	
	756106-000	8.0	222	-	-	-	540440-000	5.0	242	
	-	-	-	-	-	-	351888-000	6.0	293	
	856262-000	10.0	280	-	-	-	483726-000	7.5	367	
	-	-	-	-	-	-	443400-000	8.5	454	
	-	-	-	-	-	-	357032-000	10.5	564	
	-	-	-	-	-	-	-	-	-	

<sup>(1)</sup> Tolerances <2000 mm ± (1% + 50 mm)  
>2000 mm ± (2% + 100 mm)

<sup>(2)</sup> Tolerances ±10%